

CONTINUOUS SEED TREATING MACHINE LIQUID 011 SERIES



FUNCTION

The **AKYUREK SEED TREATMENT MACHINE STL LIQUID 022** is used for continuous,wet chemical treating of seed such as grain, corn, pulses etc.

All stainless steel manufactured Liquid applicators used for precision coating and pilling of crop with insecticides, fungicides, micronutrients and inoculants to the highest quality standards.

Integrated modern control systems provide high process flexibility, process security and process monitoring and documentation. The fully automated operations according to pre-determined formulas, online process data communication, batch and order documentation as well as formula administration guarantee high quality production standards when treating a wide range of products.

As well application of chemical to seeds, this machine can be used for water or oil application to lentil, rice, wheat, bulgur and in other tempering processes.

WORK PRINCIPLE

The seed is transported to the chemical seed treating chamber overthe inlet. There, the product is distributed in an even product veil by a rotating distributing disc. The seed dressing agent is dosed by a metering pump on a spraying disc and evenly sprayed on the seed creating a fine mist, and then brought in contact with the product veil. After applying the seed dressing agent, the product is transported to the secondary mixing unit where an even and uniform distribution on the seeds is ensured.


Advantages:


- Continuous, reliable operation
- Simple operation and handling
- Precise dosing of the liquid seed dressing agent and prevention of incorrect treatment due to the integrated automatic checking devices
- Homogeneous mixing due to fine spraying of the seed dressing agent by the spraying disc and effective mixing in the secondary mixing unit

Construction:

The chemical seed treater consists of the product inlet, the chemical seed treating chamber with the distributing and spraying disc, the dosing unit with a pump and the secondary mixing unit. The drive is operated with a gear motor. The chemical seed treater is controlled by a control cabinet with a touch panel.

Product Input

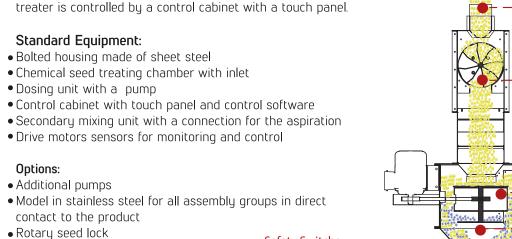

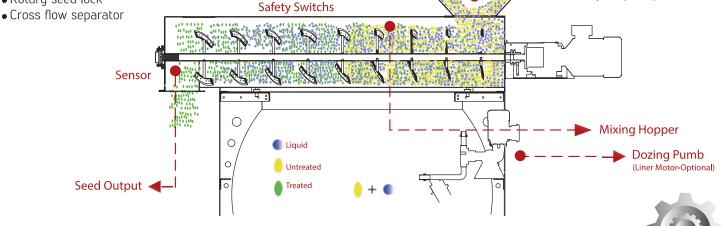

Safety Switchs

Rotary valve

Seed Spreader Disc.

▶Liquid Spreader Disc

MODELS







TECHNICAL DATA

TECHNICAL DATA		STL 005	STL 011	STL 015	STL 022	STL 030
Capacity /Based on Wheat)	t/h	1,0 to 2,5	2,5 to 5	5,0 to 10	10 to 15	20 to 30
ELECTRICAL DRIVES						
Distribution Disc	kW	0,37	0,37	0,37	0,75	0,75
Secondary mixing unit	kW	1,1	0,75	1,1	1,5	2,2
Pump	kW	0,9	0,78	0,78	0,18	0,18
Rotary seed valve	kW	0,37	0,55	0,55	1,5	1,5
Dosing of chemical liquid	mI/100kg	20 - 1880	100 - 890	200 - 1880	500 - 1000	500 - 1490

SEED TREATMENT MACHINE





Akyürek Makine A.Ş.

Karaduvar Mahallesi 65117 Sokak No:37 Mersin / TÜRKİYE

Telefon: +90 324 237 47 48 - +90 324 234 47 59

+90 324 237 37 14 - +90 324 237 47 10

Faks: +90 324 234 47 07 **E-Posta:** info@akyurekltd.com Web: www.akyurekltd.com



Akyürek Makine A.Ş.

Karaduvar Avenue 65117 Street No 37 Mersin / TÜRKİYE

Phone: +90 324 237 47 48 - +90 324 234 47 59 +90 324 237 37 14 - +90 324 237 47 10

Fax: +90 324 234 47 07 E-Mail: info@akyurekltd.com Web: www.akyurekltd.com



