


NUT BLANCHER FZSM-0-0

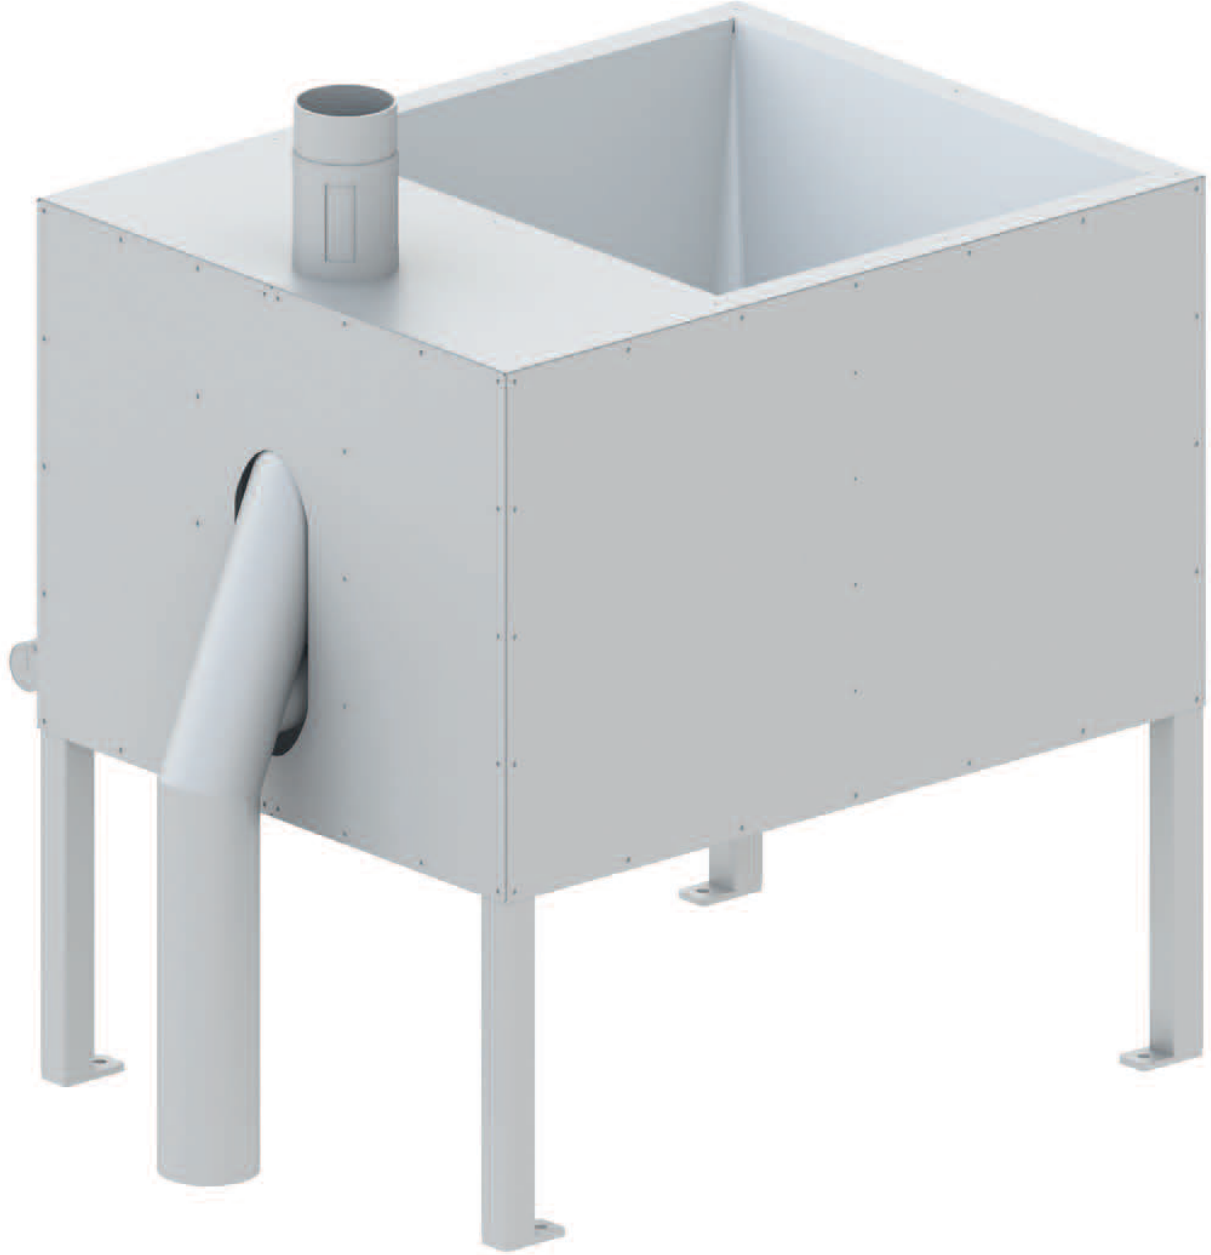

Akyürek Makine A.Ş.

Karaduvar Mahallesi 65117 Sokak
No.37 Mersin / TÜRKİYE

Telefon: +90 324 237 47 48 - +90 324 234 47 59
+90 324 237 37 14 - +90 324 237 47 10

Faks: +90 324 234 47 07

E-Posta: info@akyurekltd.com

Web: www.akyurekltd.com



Akyürek Makine A.Ş.

Karaduvar Avenue 65117 Street
No.37 Mersin / TÜRKİYE

Phone: +90 324 237 47 48 - +90 324 234 47 59
+90 324 237 37 14 - +90 324 237 47 10

Fax: +90 324 234 47 07

E-Mail: info@akyurekltd.com

Web: www.akyurekltd.com

www.akyurekltd.com

Akyürek Kardeşler San.Tic.Ltd.Şti. Have all the copyrights of the information and pictures provided in this catalogue. We have all rights to do necessary adjustments on the product & these changes may not be reflected on the catalogue at the moment of production. We will do our utmost to inform you of these changes if and when.

444 6 259



CE
ISO 9001 - 2008
QUALITY ASSURANCE

Seed Conditioning & Processing Global Solution Partner

When skin removal from nut kernels is required, Akyurek offers an efficient systems to fit the bill. Akyurek Nut Blancher gently remove the skins from nut kernels without creating excess product damage. The Akyurek Nut Blancher is designed to release skins and hearts from splits and whole nut kernels. Split Nut Blanching is normally used in peanut butter manufacturing and making chips/quarters or slices to incorporate in candies and Whole nut Blanching is used for Confectionary Snack Industry

Akyurek Blanchers are designed for ease of operation, maintenance, and sanitation. Reliability and performance are built in.

Function

Blanched to be Nut requires half roasting just before blanching, after half roasting skin on Nut Kernel would be loosen and when enters Blancher machine it would be removed with gentlest was to eliminate loss in process and increase yield. A Screen Separator is required for undersize removal. Color Sorting of un blanched nut kernel would be necessary for optimum result.

Specification	FZSM-0-0
Machine Weight	90 Kg
Machine Size xyz(mm)	915 x 913 x 703
Amount of compressed requirment	10 Bar - 15 kw
Amount of aspiration requirment	500 m ³ /h
Peanut	800 to 1000 kg per hour
Hazelnut	800 to 1000 kg per hour
Operating Condition	Half Roasted
Machine Noise Level	75-85 decibel (maximum)
Construction	Stainless Steel
Cleaning System	Self Cleaning
Standard Voltage	NONE